

INSTALLATION INSTRUCTIONS FOR N7882-750--L

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEU

MOUNTING THE FIXTURE, HARDWIRE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Attach screws (B) to the circular strap (D) and secure with nuts (C). Note: The length of the screws (B) may need adjusting.
4. Attach the circular strap (D) to the junction box (A), not included, using the mounting screws (F) (size: #8-32N*L5/8"). The side of the circular strap (D) marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig.2. Make sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap (D) using the green screw (E) provided. Tuck the wire connections neatly into the outlet box.
6. Place fixture body over the circular strap (D) and secure with knobs (G).
7. Install (2) two G9 base bulbs (H) up to 40 watts each or CFL or LED equivalent (included) in accordance with the fixture specification. **(DO NOT EXCEED THE SPECIFIED WATTAGE!)** **(NE PAS DEPASSER LAA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the outlet box and test the fixture.

IMPORTANT: FIXTURE SHOULD BE INSTALLED

BY A QUALIFIED ELECTRICIAN TO ENSURE

PROPER WIRING AND INSTALLATION.

Fig. 1

Set-Mounting#A-021

- Circular strap (1)
- Green screw (1)
- Mounting screw (2)

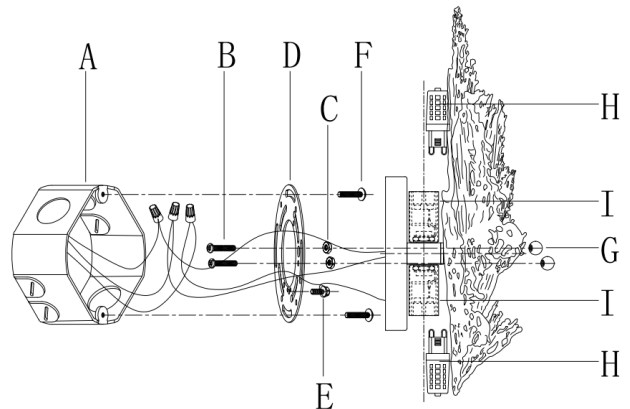


Fig. 2

